

iGo22-RT3

22" Eco-Friendly Widescreen High Definition Resistive Touch Panel PC

www.igologic.com



Windows XP

FCC CE



System

CPU	Intel® Core™ 2 Duo 2.26GHz (P8400)
Chipset	Intel® GM45 Express + ICH9M
BIOS	Award 8M
Memory	2 x DDR2 DIMM, Max 4 GB
Mounting	VESA Compatible 75x75, 100x100(mm)
HDD	2.5" 160 GB
Size	21.5" x 13.3" x 3.3" / 547 x 338 x 83 (mm)
Ethernet	10/100/1000 Gigabit Lan Ethernet
Operating Temp.	0°C ~ 60°C / 32°F ~ 140°F
Power Supply	AC-DC AC 100-240V 23W US Power Adapter
Warranty	1 Year Limited Warranty (Parts and Labor)
Slots	1x PCI, 1x PCI-E(x1), 1x Mini PCI, 1x MiniPCI-E(Used for WIFI)
Certificate	FCC, CE, UL, CUL, TUV
I/O	1x IDE, 1x FDD, 1x KB, 1x Mouse 2x RS-232, 2x SATA II, 6 x USB 2.0 IrDA, 1394, Digital I/O (4-in/4-out)
Speaker	Internal Speaker 2x5W

Display

Chipset	ICH7M, Winbond W83627EHG
Memory	Max. Up To 128MB Frame Buffer Sharing System
Resolution	1680x1050 Pixels (Native Resolution)
Contrast Ratio	1000:1 (Typical)
Brightness	300 (cd/m2)
Viewing Angle	Horizontal: 85°/85°, Vertical: 80°/80°
Touch	Resistive Touch
Tilting Angle	10° ~ 90° Countertop Stand w/ Optional Stand
Housing	Black Color Plastic front Bezel, metal housing

Optional

Solid State	Replace 2.5" SSD or Compactflash™
OS	Windows 7, XP Embedded, XP Pro Embedded
Table Stand	10° ~ 90° Countertop Stand
MSR Card Reader	MSR Track 1, 2 or 2, 3 or 1, 2, 3, selectable
Bar Code Scanner	Omni-Directional or One-Line
COM Port	COM 2 can be set to RS422/485

Introduction


Intel® Core™ 2 Duo 2.26GHz with a 22" widescreen TFT LCD WXGA Resistive Touch screen. It provides the best high definition video performance to support multimedia applications. It also features 6 USB 2.0 ports, internal speakers, and more. It supports Microsoft Windows 7, XP Embedded, XP Pro Embedded on a 2.5" hard drive, a solid state hard drive, or a Compact flash™ module. The iGo22-RT3 can be broadly implemented and is suitable in several markets such as, Digital Signage, POS, kiosks, gaming markets, and industrial automation.

Features

Intel® Core™ 2 Duo 2.26GHz (P8400)
22" TFT Resistive Touch WXGA Screen
2 x COM Ports for Transaction Terminal Applications
2 x 10/100/1000 Gigabit LAN
Wireless LAN b/g/n
6 x USB 2.0 Ports
Industrial Dustproof

Packing List

AC Adapter, Driver CD

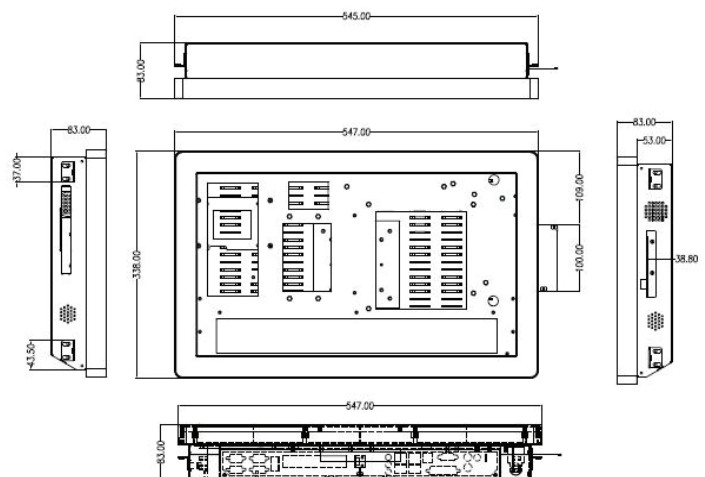

iGoLogic
Your Best Solution Provider

4117 Clipper Court
Fremont, CA 94538, USA
Toll Free: 1-877-IGO-9888
Phone: 1-510-252-9388 | Fax: 1-510-252-9399

*All specifications and photos are subjected to change without notice.

inspiration & innovation Go on